


☛ OIL FREE ☛ POWERFUL ☛ EFFICIENT ☛ ECONOMIC SOLUTION FOR PET BLOWING

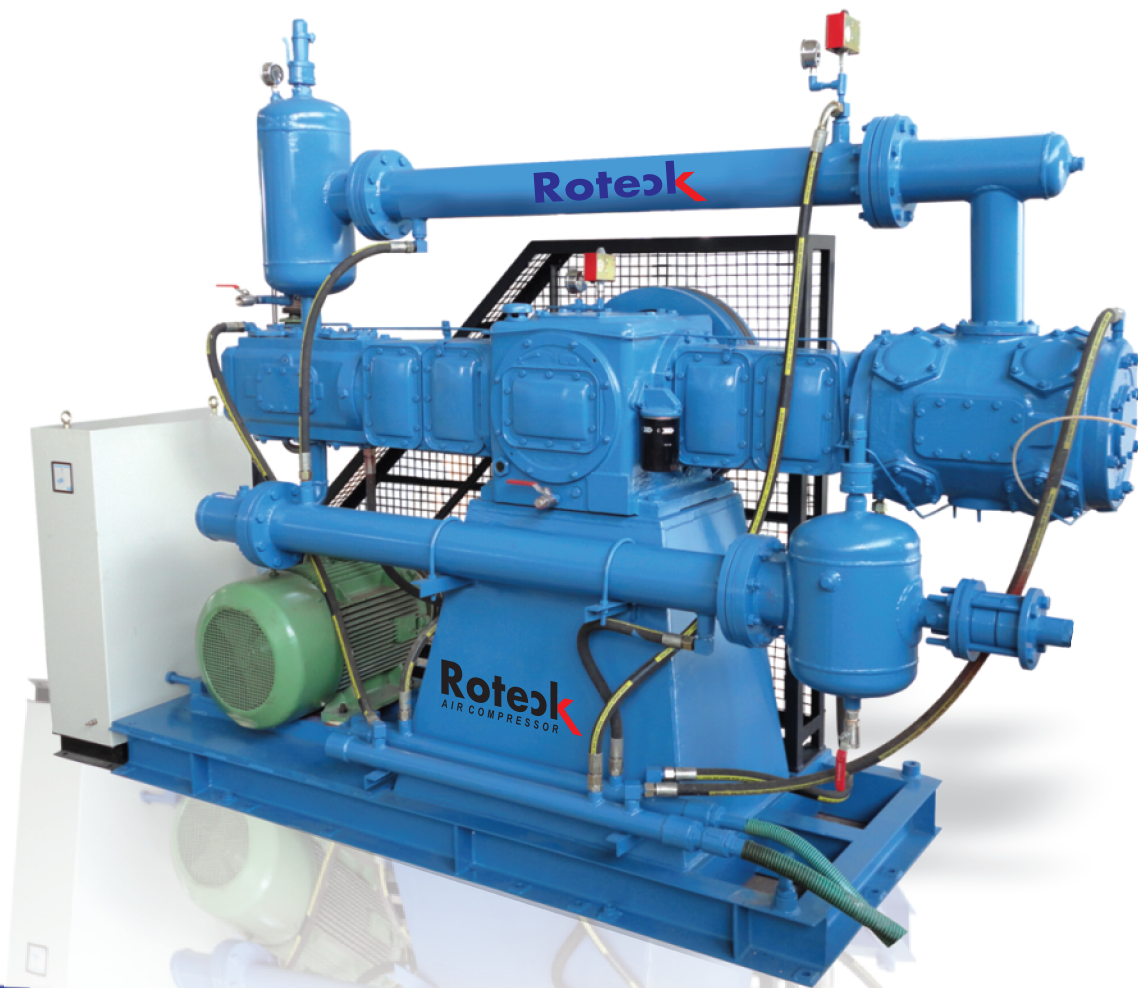

100% Oil Free, High Pressure Compressor

Model	Motor HP	No of Stages	fad cfm at 35kg/cm ² g	Max. working pressure kg/cm ² g	Dimension L W H (in inches)
RTBO 42/40	40	3	110	42	102 x 60 x 70
RTBO 42/50	50	3	137	42	102 x 60 x 70
RTBO 42/60	60	3	165	42	102 x 60 x 70
RTBO 42/75	75	3	195	42	102 x 60 x 70
RTBO 42/100	100	3	236	42	109 x 78 x 90
RTBO 42/120	120	3	295	42	109 x 78 x 90
RTBO 42/150	150	3	354	42	109 x 78 x 90
RTBO 42/180	180	3	425	42	109 x 78 x 90
RTBO 42/215	215	3	510	42	109 x 78 x 90


Lower Operating Cost



Lower Maintenance Cost



Ideal For Pet Blowing

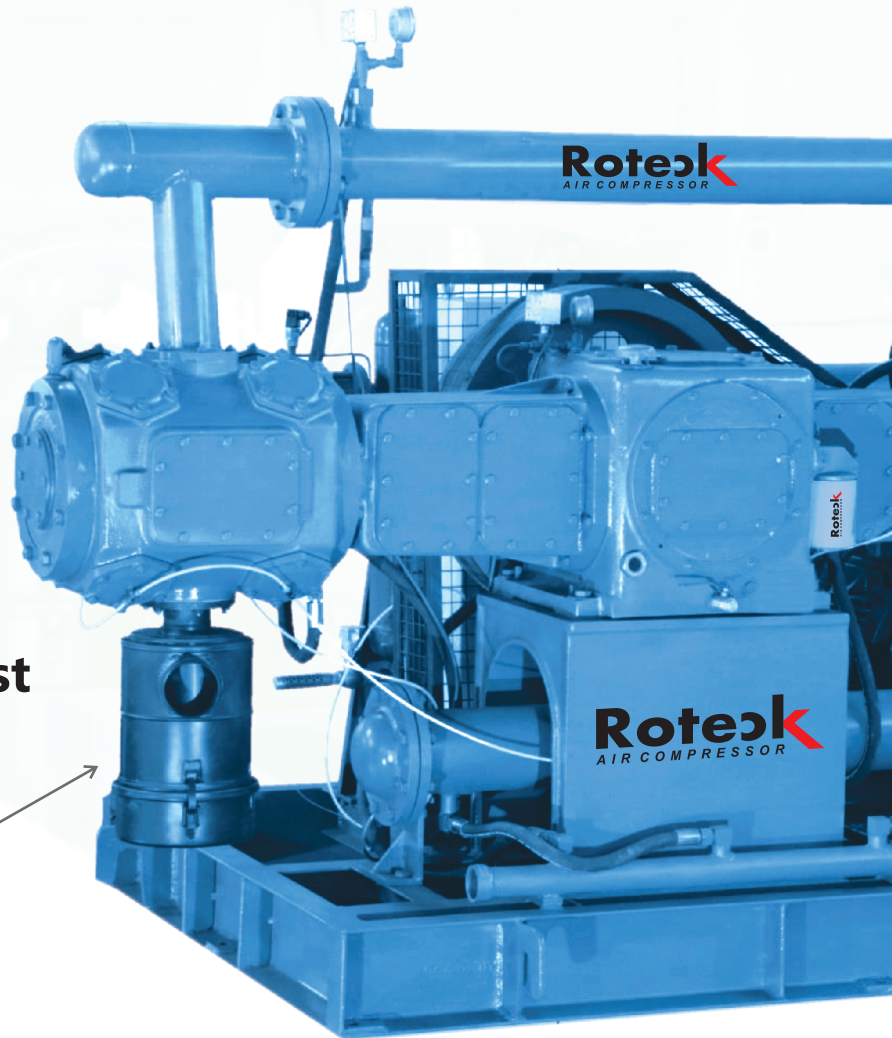


Horizontal Two Cylinder Single Stage
Balance-opposed Models

Features :

- (a) Valve, Piston & Rider rings designed for annual one time maintenance
- (b) Low RPM & rugged cast iron design ideal for heavy duty continues 24x7 operating year's
- (c) Forged Crank Shaft & Connecting Rod, Precision Main & Crank Pin Bearings with force feed lubrication have very high load bearing capacity & hardly needs replacements.
- (d) Two throw balance-opposed frame, design to minimize unbalanced forces.
- (e) Cylinders constructed with large cast in water jackets & Specially Designed intercoolers for dimensional stability & better cooling under continues operation.
- (f) Distance pieces features two compartments ensuring the lubricant isolated from the cylinders.
- (g) All components constructed in accordance with international standards.
- (h) Rotek pet packages comes with built in single point water Inlet/Outlet connection and air outlet connection.

It requires very little time and labour during installation motor, starter and control panel, after cooler, non return valve with optional Air Dryer, compressed air filter and Air Receiver. It is Plant tested at 100% Operating pressure It's ready to use. Just plug in to power supply.

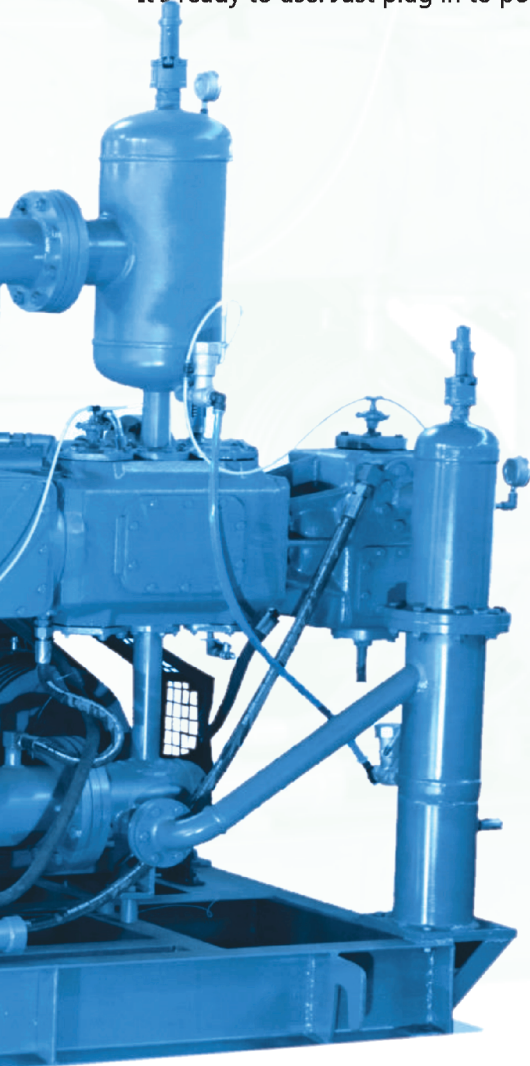

Horizontal Two Stage Balance-opposed Models

Model	Motor HP	FAD CFM at 7 kg/cm ² g	FAD CFM at 10 kg/cm ² g
RTBO 10-40 P	40	223	189
RTBO 10-50 P	50	273	214
RTBO 10-60 P	60	332	283
RTBO 10-75 P	70	415	324
RTBO 10-100 P	100	524	472
RTBO 10-120 P	120	644	576
RTBO 10-150 P	150	817	682
RTBO 10-180 P	180	922	819
RTBO 10-215 P	215	1182	955

HEAVY DUTY WATER-COOLED AIR COMPRESSOR



Model RT 11X 7V



Model RT 8 X 7NL

Model	Motor HP	Comp. Rpm.	FAD	Maximum Working Pressure	
				kg/cm ² g	psig
RT 7 X 5 V	30	750	110	8.80	125
RT 8 X 5 V	40	750	143	7.00	100
RT 8 X 7 V	50	650	180	9.50	135
RT 9 X 7 V	60	650	240	7.70	110
RT 11 X 7 V	75	650	319	7.00	100
RT12 & 7X 7 OB	125	750	547	8.80	125
RT16 & 10 X 7 OB	250	750	1045	8.80	125


Our Other Products



SCREW
Air Compressor



RECIPROCATING
Air Compressor



OIL FREE, HIGH PRESSUR
Air Compressor



AIR DRYER



Air Receiver



Moisture Separator



Auto Drain Valve



Roteck
Equipment Limited

A-33/20, Site-IV Sahibabad Ind. Area, Ghaziabad (U.P.) INDIA
Tel. : +91-120-2897259, 276, 304, 306. Fax : +91-0120-4134182
E-mail:sale@roteckcompressor.com - www.roteckcompressor.com

